

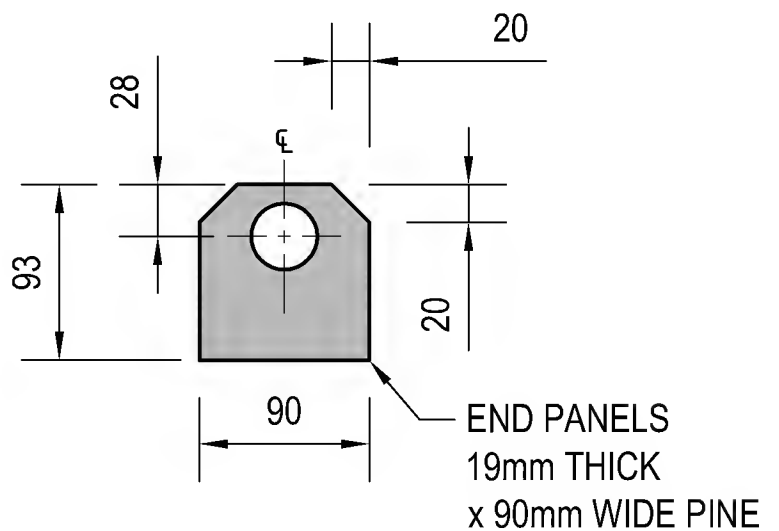


35mm Ø DOWEL HANDEL

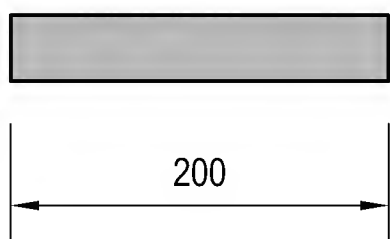

TO MAKE A PAIR OF ISHI SASHI:
 2 x BASE
 2 x HANDEL
 4 x END PANELS

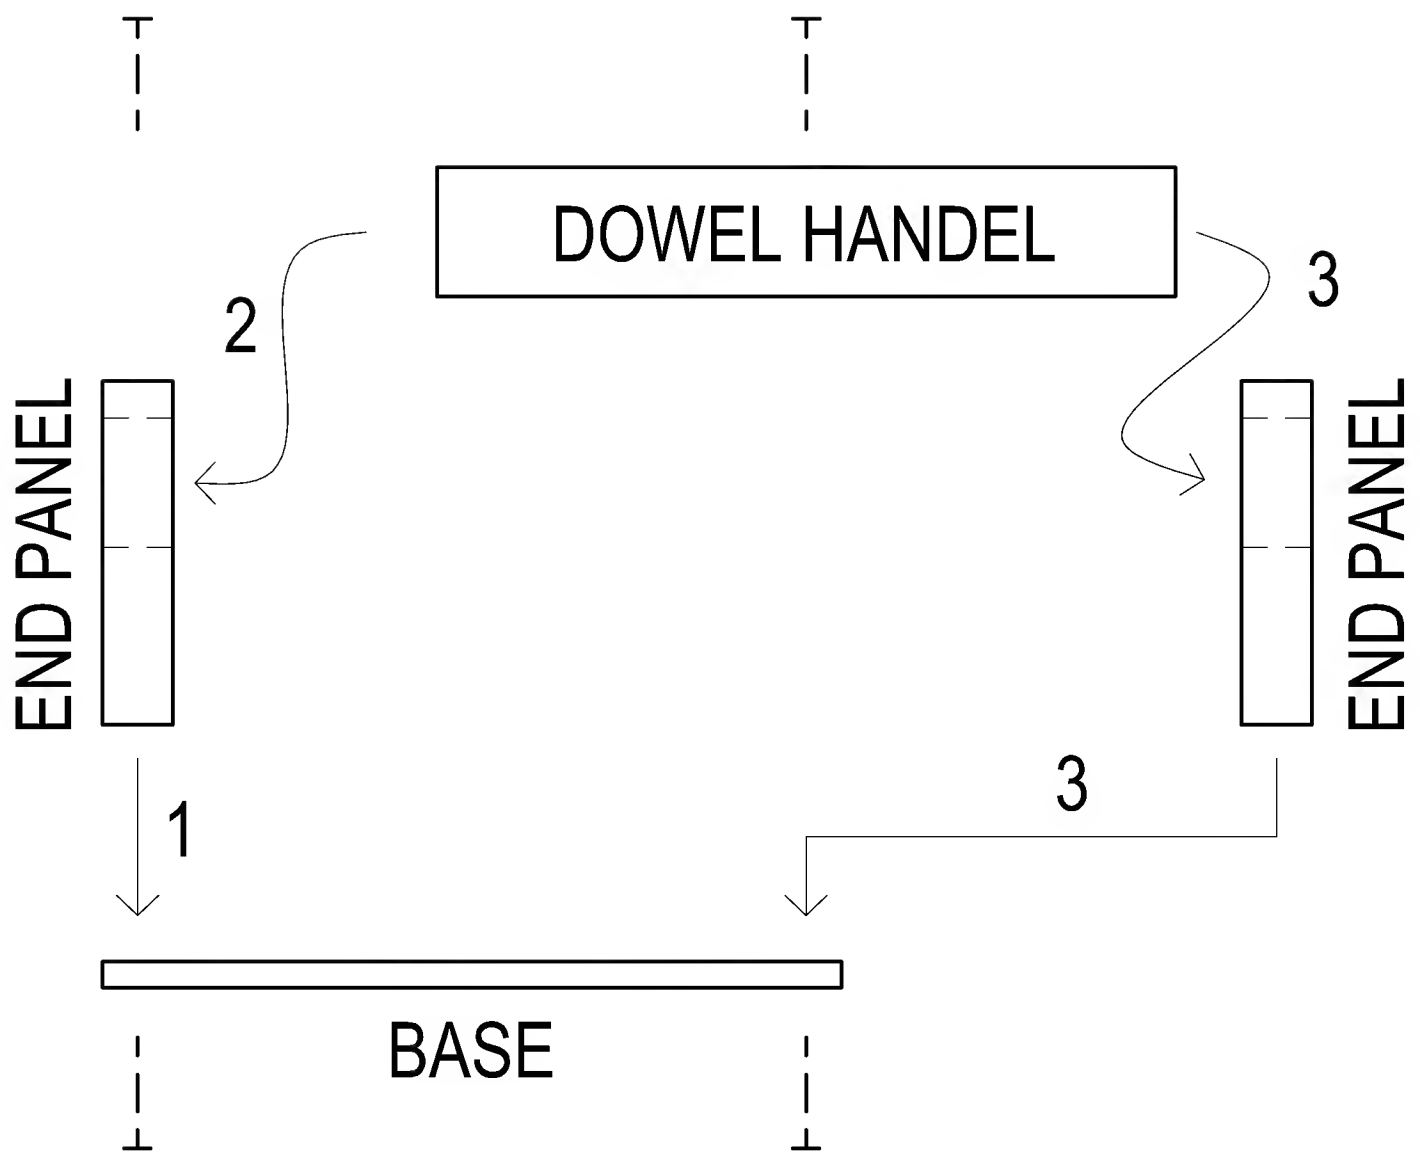

- FIX FIRST END PANEL TO BASE (1) - GLUE & SCREW FIX.
- INSERT HANDLE INTO FIRST END PANEL (2)
- PLACE SECOND END PANEL TO BASE AND INSERT HANDLE (3) - GLUE & SCREW FIX TO BASE.
- GLUE & SCREW FIX HANDLE TO END PANELS.
- WRAP BRICK IN DUCT TAPE.
- POSITION HANDLE AND ATTACH USING DUCT TAPE.

NOTE: If you have a nice clean brick and want to keep it exposed, you could drill into the top of the brick & through the base & fix with a couple of masonry anchors.
Leave the fitting & fixing of the dowel handle last for ease of fitting masonry anchors.